

CARRIER-A - FULL SITE MODERNIZATION

TXGR0719 ARBOR BEND

SCOPE OF WORK

- 1. INSTALL (3) NNH4-65B-R6
- 2. INSTALL (3) RADIO 4449 B5 B12
- 3. INSTALL (2) RADIO 4460 B2 B66
- 4. INSTALL (3) AIR 6449 B77D
- 5. INSTALL (3) AIR 6419 B41
- 6. REMOVE (3) SBNHH-1D65B
- 7. REMOVE (3) RRUS 11 B12
- 8. REMOVE (3) APXVSP18-C-A20
- 9. REMOVE (3) RADIO 2217 B66A
- 10. INSTALL (1) BASEBAND 6648 IN EXISTING CABINET
- 11. INSTALL (1) BASEBAND 6651 IN EXISTING CABINET
- 12. INSTALL (2) HYBRID TRUNK 6x12, 300 FT, WITH TOP AND BASE OVP
- 13. REPLACE EXISTING T-ARMS WITH NEW 12 FT SECTOR FRAMES
- 14. FIELD VERIFY ALL EXISTING CONDITIONS PRIOR TO CONSTRUCTION

SHEET INDEX

- T-1 TITLE SHEET & SCOPE OF WORK
- A-2 ELEVATION
- A-3 ANTENNA LAYOUT PLAN
- A-4 ANTENNA & CABLE SCHEDULE
- E-1 GROUNDING PLAN & NOTES

SITE INFORMATION

SITE ID: TXGR0719
SITE NAME: Arbor Bend
MARKET: DFW
CUSTOMER: CARRIER-A
ADDRESS: 2400 S Great Southwest Pkwy (synthetic)
CITY: Grand Prairie
STATE: TX
ZIP: 75052
LATITUDE: 32.7092
LONGITUDE: -97.0143
STRUCTURE TYPE: Self-support tower
STRUCTURE HEIGHT (FT): 195
STRUCTURE OWNER: Trinity Structures
PROJECT TYPE: Full site modernization

GENERAL NOTES

CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND EXISTING CONDITIONS BEFORE ORDERING MATERIAL.
ALL WORK PER CARRIER BUILD STANDARDS AND TIA-222-H.
RF CONFIGURATION PER RFDS R3.
MOUNT AND STRUCTURAL ADEQUACY PER MA/SA REPORTS.

MERIDIAN A&E GROUP
(SYNTHETIC SAMPLE)

CLIENT: ERICSSON
CARRIER: CARRIER-A

SITE ID: TXGR0719
SITE: ARBOR BEND
2400 S GREAT SOUTHWEST PKW
GRAND PRAIRIE, TX 75052

STRUCTURE: SELF-SUPPORT TOWER
HEIGHT: 195 FT


REV 1 2026-08-24
ISSUED FOR CONSTRUCTION

NOT FOR CONSTRUCTION -
SYNTHETIC POC DATA

SHEET TITLE:
TITLE SHEET & SCOPE OF WORK

SHEET T-1

RAD CENTER 190'-0"

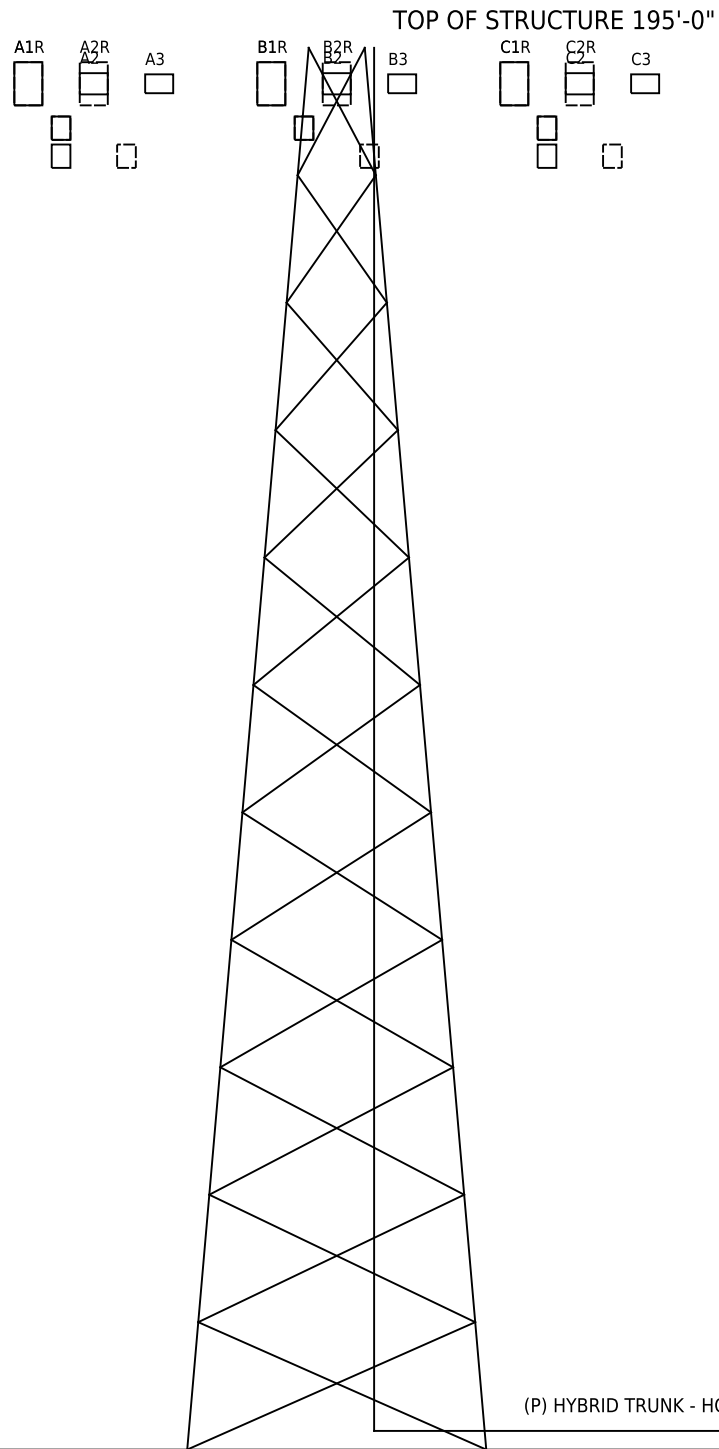

EQUIPMENT KEY

A1R (R) SBNHH-1D65B RC 190'

A2R (R) APXVSPP18-C-A20 RC 190'

A1 (P) NNH4-65B-R6 RC 190'

A2 (P) AIR 6449 B77D RC 190'

A3 (P) AIR 6419 B41 RC 190'

B1R (R) SBNHH-1D65B RC 190'

B2R (R) APXVSPP18-C-A20 RC 190'

B1 (P) NNH4-65B-R6 RC 190'

B2 (P) AIR 6449 B77D RC 190'

B3 (P) AIR 6419 B41 RC 190'

C1R (R) SBNHH-1D65B RC 190'

C2R (R) APXVSPP18-C-A20 RC 190'

C1 (P) NNH4-65B-R6 RC 190'

C2 (P) AIR 6449 B77D RC 190'

C3 (P) AIR 6419 B41 RC 190'

(E) EQUIPMENT CABINET

(P) HYBRID TRUNK - HORIZ RUN 40 FT

FINISHED GRADE 0'-0"

MERIDIAN A&E GROUP
(SYNTHETIC SAMPLE)

CLIENT: ERICSSON
CARRIER: CARRIER-A

SITE ID: TXGR0719
SITE: ARBOR BEND
2400 S GREAT SOUTHWEST PKW
GRAND PRAIRIE, TX 75052

STRUCTURE: SELF-SUPPORT TOWER
HEIGHT: 195 FT


REV 1 2026-08-24
ISSUED FOR CONSTRUCTION

NOT FOR CONSTRUCTION -
SYNTHETIC POC DATA

SHEET TITLE:
ELEVATION

SHEET A-2

N

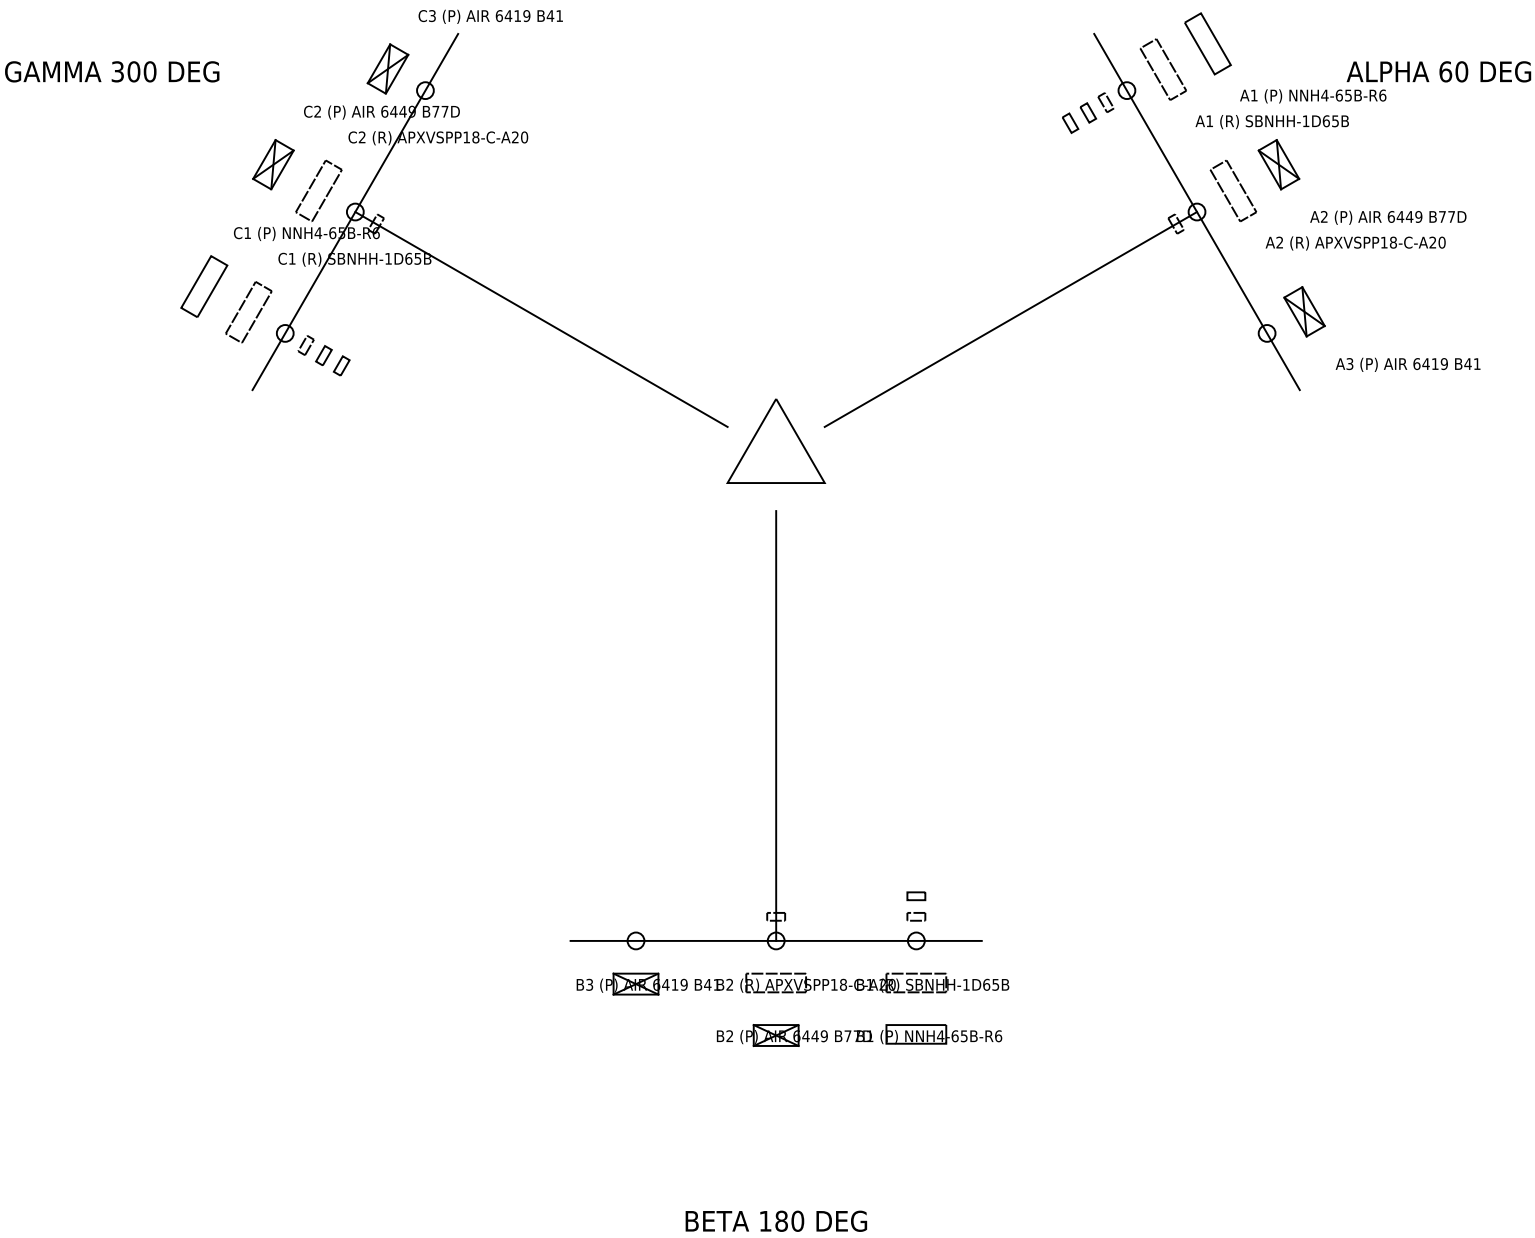

MERIDIAN A&E GROUP
(SYNTHETIC SAMPLE)

CLIENT: ERICSSON
CARRIER: CARRIER-A

SITE ID: TXGR0719
SITE: ARBOR BEND
2400 S GREAT SOUTHWEST PKW
GRAND PRAIRIE, TX 75052

STRUCTURE: SELF-SUPPORT TOWER
HEIGHT: 195 FT

REV 1 2026-08-24
ISSUED FOR CONSTRUCTION

NOT FOR CONSTRUCTION -
SYNTHETIC POC DATA

SHEET TITLE:
ANTENNA LAYOUT PLAN

SHEET A-3

ANTENNA & EQUIPMENT SCHEDULE

SECTOR	AZ	POS	STATUS	TYPE	MANUFACTURER	MODEL	RC (FT)	M-TILT	BANDS
ALPHA	60	1	REMOVE	ANTENNA	COMMSCOPE	SBNHH-1D65B	190	2	LB/MB
ALPHA	60	1	PROPOSED	ANTENNA	COMMSCOPE	NNH4-65B-R6	190	2	LB/MB
ALPHA	60	1	REMOVE	RRU	ERICSSON	RRUS 11 B12	190	-	B12
ALPHA	60	1	PROPOSED	RRU	ERICSSON	RADIO 4449 B5 B12	190	-	B5/B12
ALPHA	60	1	PROPOSED	RRU	ERICSSON	RADIO 4460 B2 B66	190	-	B2/B66
ALPHA	60	2	REMOVE	ANTENNA	RFS	APXVSP18-C-A20	190	1	MB
ALPHA	60	2	PROPOSED	AAU	ERICSSON	AIR 6449 B77D	190	1	n77
ALPHA	60	2	REMOVE	RRU	ERICSSON	RADIO 2217 B66A	190	-	B66
ALPHA	60	3	PROPOSED	AAU	ERICSSON	AIR 6419 B41	190	2	n41
BETA	180	1	REMOVE	ANTENNA	COMMSCOPE	SBNHH-1D65B	190	0	LB/MB
BETA	180	1	PROPOSED	ANTENNA	COMMSCOPE	NNH4-65B-R6	190	0	LB/MB
BETA	180	1	REMOVE	RRU	ERICSSON	RRUS 11 B12	190	-	B12
BETA	180	1	PROPOSED	RRU	ERICSSON	RADIO 4449 B5 B12	190	-	B5/B12
BETA	180	2	REMOVE	ANTENNA	RFS	APXVSP18-C-A20	190	1	MB
BETA	180	2	PROPOSED	AAU	ERICSSON	AIR 6449 B77D	190	1	n77
BETA	180	2	REMOVE	RRU	ERICSSON	RADIO 2217 B66A	190	-	B66
BETA	180	3	PROPOSED	AAU	ERICSSON	AIR 6419 B41	190	0	n41
GAMMA	300	1	REMOVE	ANTENNA	COMMSCOPE	SBNHH-1D65B	190	0	LB/MB
GAMMA	300	1	PROPOSED	ANTENNA	COMMSCOPE	NNH4-65B-R6	190	0	LB/MB
GAMMA	300	1	REMOVE	RRU	ERICSSON	RRUS 11 B12	190	-	B12
GAMMA	300	1	PROPOSED	RRU	ERICSSON	RADIO 4449 B5 B12	190	-	B5/B12
GAMMA	300	1	PROPOSED	RRU	ERICSSON	RADIO 4460 B2 B66	190	-	B2/B66
GAMMA	300	2	REMOVE	ANTENNA	RFS	APXVSP18-C-A20	190	1	MB
GAMMA	300	2	PROPOSED	AAU	ERICSSON	AIR 6449 B77D	190	1	n77
GAMMA	300	2	REMOVE	RRU	ERICSSON	RADIO 2217 B66A	190	-	B66
GAMMA	300	3	PROPOSED	AAU	ERICSSON	AIR 6419 B41	190	0	n41

CABLE SCHEDULE (REQ'D = 1.10 x (VERT + HORIZ))

TRUNK	TYPE	FROM	TO	VERT (FT)	HORIZ (FT)	REQ'D (FT)	SPECIFIED
T1	HYBRID 6x12	BASE OVP / CABINET	TOP OVP	195	40	258.5	300 FT
T2	HYBRID 6x12	BASE OVP / CABINET	TOP OVP	195	40	258.5	300 FT

JUMPER SCHEDULE

JUMPER	ROUTE	LENGTH	QTY
DC JUMPER 8 AWG	TOP OVP TO RRU	15 FT	5
FIBER JUMPER LC-LC	TOP OVP TO RRU	15 FT	5
DC JUMPER 8 AWG	TOP OVP TO AAU	20 FT	6
FIBER JUMPER LC-LC	TOP OVP TO AAU	20 FT	6

MERIDIAN A&E GROUP
(SYNTHETIC SAMPLE)

CLIENT: ERICSSON
CARRIER: CARRIER-A

SITE ID: TXGR0719
SITE: ARBOR BEND
2400 S GREAT SOUTHWEST PKW
GRAND PRAIRIE, TX 75052

STRUCTURE: SELF-SUPPORT TOWER
HEIGHT: 195 FT


REV 1 2026-08-24
ISSUED FOR CONSTRUCTION

NOT FOR CONSTRUCTION -
SYNTHETIC POC DATA

SHEET TITLE:
ANTENNA & CABLE SCHEDULE

SHEET A-4

GROUNDING PLAN

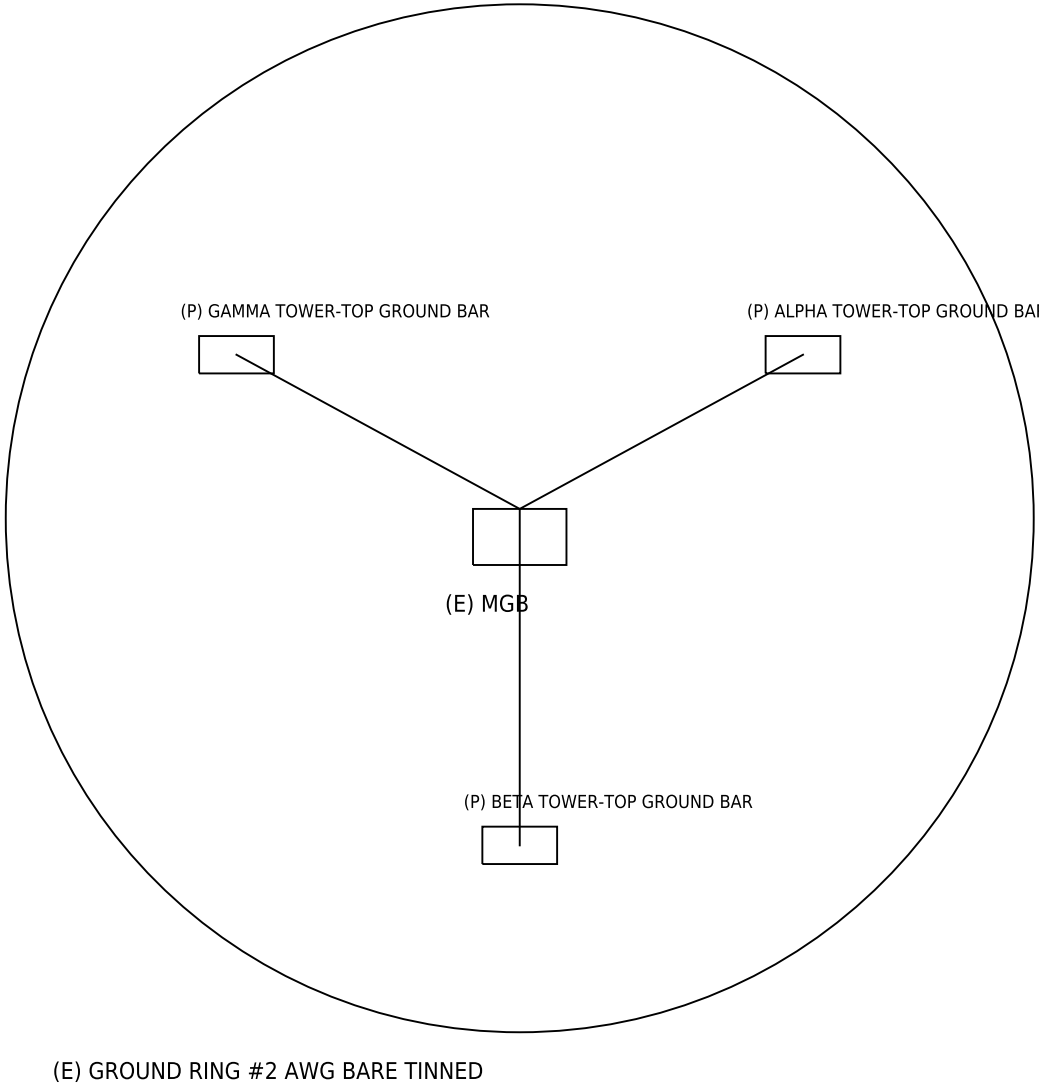

- 1. BOND EACH NEW RRU, AAU AND ANTENNA TO SECTOR GROUND BAR WITH #6 AWG.
- 2. GROUND HYBRID TRUNK AT TOP, BOTTOM AND MID-SPAN IF > 200 FT.
- 3. BOND TOP AND BASE OVP ENCLOSURES WITH #6 AWG.
- 4. ALL LUGS TWO-HOLE, TINNED, WITH ANTI-OXIDANT.

MERIDIAN A&E GROUP
(SYNTHETIC SAMPLE)

CLIENT: ERICSSON
CARRIER: CARRIER-A

SITE ID: TXGR0719
SITE: ARBOR BEND
2400 S GREAT SOUTHWEST PKW
GRAND PRAIRIE, TX 75052

STRUCTURE: SELF-SUPPORT TOWER
HEIGHT: 195 FT

REV 1 2026-08-24
ISSUED FOR CONSTRUCTION

NOT FOR CONSTRUCTION -
SYNTHETIC POC DATA

SHEET TITLE:
GROUNDING PLAN & NOTES

SHEET E-1