

CARRIER-A - 5G C-BAND ADD

TXDA1024 LAKEWOOD HEIGHTS

SCOPE OF WORK

- 1. INSTALL (3) AIR 6449 B77D
- 2. INSTALL (1) BASEBAND 6648 IN EXISTING CABINET
- 3. INSTALL (1) HYBRID TRUNK 6x12, 200 FT, WITH TOP AND BASE OVP
- 4. FIELD VERIFY ALL EXISTING CONDITIONS PRIOR TO CONSTRUCTION

SHEET INDEX

- T-1 TITLE SHEET & SCOPE OF WORK
- A-2 ELEVATION
- A-3 ANTENNA LAYOUT PLAN
- A-4 ANTENNA & CABLE SCHEDULE
- E-1 GROUNDING PLAN & NOTES

SITE INFORMATION

SITE ID: TXDA1024
SITE NAME: Lakewood Heights
MARKET: DFW
CUSTOMER: CARRIER-A
ADDRESS: 6120 Abrams Rd (synthetic)
CITY: Dallas
STATE: TX
ZIP: 75214
LATITUDE: 32.8341
LONGITUDE: -96.7512
STRUCTURE TYPE: Monopole
STRUCTURE HEIGHT (FT): 150
STRUCTURE OWNER: Lonestar Tower Partners
PROJECT TYPE: 5G C-band add

GENERAL NOTES

CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND EXISTING CONDITIONS BEFORE ORDERING MATERIAL.
ALL WORK PER CARRIER BUILD STANDARDS AND TIA-222-H.
RF CONFIGURATION PER RFDS R3.
MOUNT AND STRUCTURAL ADEQUACY PER MA/SA REPORTS.

REVISION 2 - REDLINES INCORPORATED

- 1. [A-3] DELETE (E) SPARE PIPE AT BETA POS 3 - NOT PRESENT PER DRONE SURVEY. ADD (P) MOUNT PIPE IF POSITION IS USED. (DSC-2ED927169C3D, redline APPROVED, APPLIED)

MERIDIAN A&E GROUP
(SYNTHETIC SAMPLE)

CLIENT: ERICSSON
CARRIER: CARRIER-A

SITE ID: TXDA1024
SITE: LAKEWOOD HEIGHTS
6120 ABRAMS RD (SYNTHETIC)
DALLAS, TX 75214

STRUCTURE: MONOPOLE
HEIGHT: 150 FT

REV 2 2026-10-08
ISSUED FOR CONSTRUCTION

NOT FOR CONSTRUCTION -
SYNTHETIC POC DATA

REVISIONS
1 2026-08-20 ISSUED FOR CONSTRUCTION
2 2026-10-08 REDLINES INCORPORATED




SHEET TITLE:
TITLE SHEET & SCOPE OF WORK

SHEET T-1

RAD CENTER 145'-0"

RAD CENTER 138'-0"

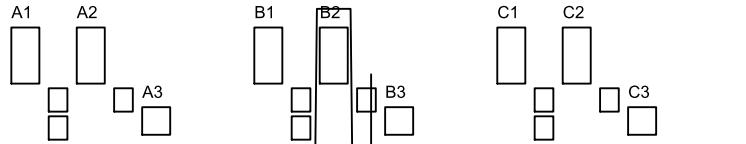

EQUIPMENT KEY

A1 (E) NNH4-65B-R6 RC 145'

A2 (E) APXVSPP18-C-A20 RC 145'

A3 (P) AIR 6449 B77D RC 138'

B1 (E) NNH4-65B-R6 RC 145'

B2 (E) APXVSPP18-C-A20 RC 145'

B3 (P) AIR 6449 B77D RC 138'

C1 (E) NNH4-65B-R6 RC 145'

C2 (E) APXVSPP18-C-A20 RC 145'

C3 (P) AIR 6449 B77D RC 138'

(E) EQUIPMENT CABINET

(P) HYBRID TRUNK - HORIZ RUN 28 FT

FINISHED GRADE 0'-0"

MERIDIAN A&E GROUP
(SYNTHETIC SAMPLE)

CLIENT: ERICSSON
CARRIER: CARRIER-A

SITE ID: TXDA1024
SITE: LAKEWOOD HEIGHTS
6120 ABRAMS RD (SYNTHETIC)
DALLAS, TX 75214

STRUCTURE: MONOPOLE
HEIGHT: 150 FT

REV 2 2026-10-08
ISSUED FOR CONSTRUCTION

NOT FOR CONSTRUCTION -
SYNTHETIC POC DATA


REVISIONS
1 2026-08-20 ISSUED FOR CONSTRUCTION
2 2026-10-08 REDLINES INCORPORATED



SHEET TITLE:
ELEVATION

SHEET A-2

N

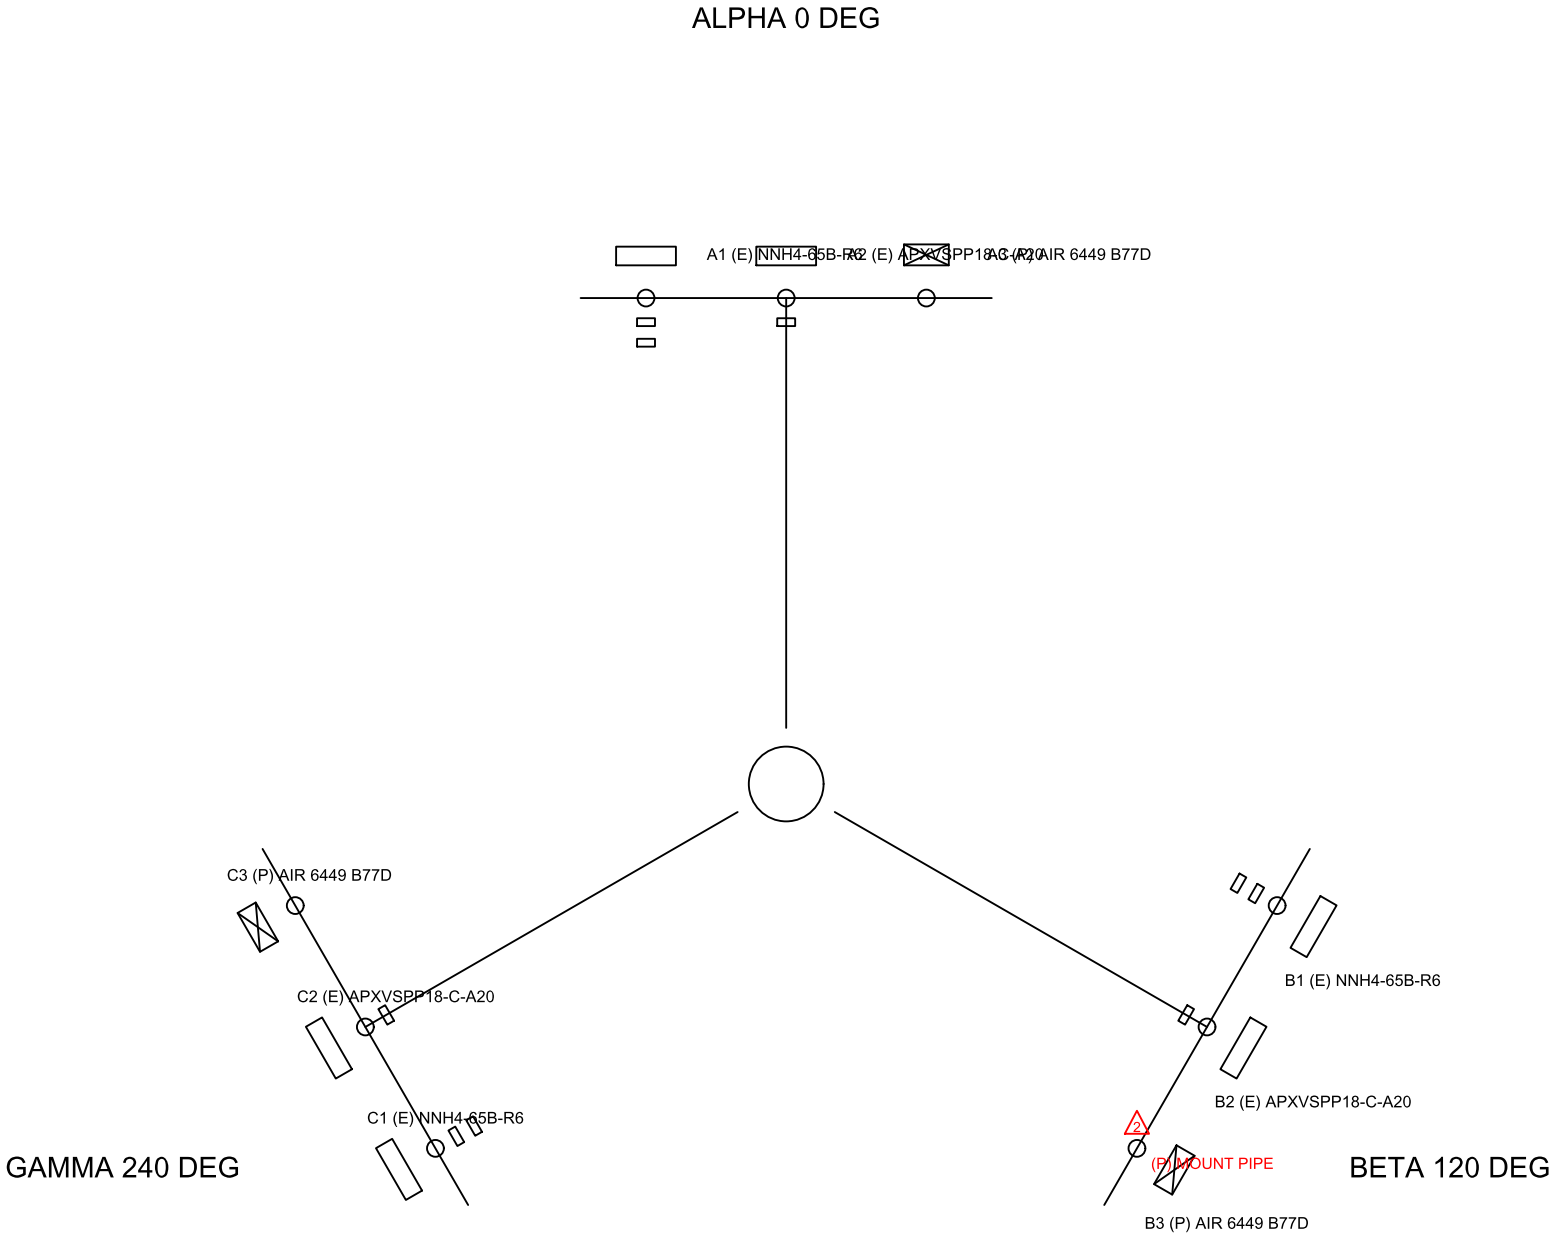

MERIDIAN A&E GROUP
(SYNTHETIC SAMPLE)

CLIENT: ERICSSON
CARRIER: CARRIER-A

SITE ID: TXDA1024
SITE: LAKEWOOD HEIGHTS
6120 ABRAMS RD (SYNTHETIC)
DALLAS, TX 75214

STRUCTURE: MONOPOLE
HEIGHT: 150 FT

REV 2 2026-10-08
ISSUED FOR CONSTRUCTION

NOT FOR CONSTRUCTION -
SYNTHETIC POC DATA

REVISIONS

1	2026-08-20	ISSUED FOR CONSTRUCTION
2	2026-10-08	REDLINES INCORPORATED



SHEET TITLE:
ANTENNA LAYOUT PLAN

SHEET A-3

ANTENNA & EQUIPMENT SCHEDULE

SECTOR	AZ	POS	STATUS	TYPE	MANUFACTURER	MODEL	RC (FT)	M-TILT	BANDS
ALPHA	0	1	EXISTING	ANTENNA	COMMSCOPE	NNH4-65B-R6	145	0	LB/MB
ALPHA	0	1	EXISTING	RRU	ERICSSON	RADIO 4449 B5 B12	145	-	B5/B12
ALPHA	0	1	EXISTING	RRU	ERICSSON	RADIO 4460 B2 B66	145	-	B2/B66
ALPHA	0	2	EXISTING	ANTENNA	RFS	APXVSPP18-C-A20	145	0	MB
ALPHA	0	2	EXISTING	RRU	ERICSSON	RADIO 2217 B66A	145	-	B66
ALPHA	0	3	PROPOSED	AAU	ERICSSON	AIR 6449 B77D	138	1	n77
BETA	120	1	EXISTING	ANTENNA	COMMSCOPE	NNH4-65B-R6	145	0	LB/MB
BETA	120	1	EXISTING	RRU	ERICSSON	RADIO 4449 B5 B12	145	-	B5/B12
BETA	120	1	EXISTING	RRU	ERICSSON	RADIO 4460 B2 B66	145	-	B2/B66
BETA	120	2	EXISTING	ANTENNA	RFS	APXVSPP18-C-A20	145	2	MB
BETA	120	2	EXISTING	RRU	ERICSSON	RADIO 2217 B66A	145	-	B66
BETA	120	3	PROPOSED	AAU	ERICSSON	AIR 6449 B77D	138	0	n77
GAMMA	240	1	EXISTING	ANTENNA	COMMSCOPE	NNH4-65B-R6	145	1	LB/MB
GAMMA	240	1	EXISTING	RRU	ERICSSON	RADIO 4449 B5 B12	145	-	B5/B12
GAMMA	240	1	EXISTING	RRU	ERICSSON	RADIO 4460 B2 B66	145	-	B2/B66
GAMMA	240	2	EXISTING	ANTENNA	RFS	APXVSPP18-C-A20	145	1	MB
GAMMA	240	2	EXISTING	RRU	ERICSSON	RADIO 2217 B66A	145	-	B66
GAMMA	240	3	PROPOSED	AAU	ERICSSON	AIR 6449 B77D	138	0	n77

CABLE SCHEDULE (REQ'D = 1.10 x (VERT + HORIZ))

TRUNK	TYPE	FROM	TO	VERT (FT)	HORIZ (FT)	REQ'D (FT)	SPECIFIED
T1	HYBRID 6x12	BASE OVP / CABINET	TOP OVP	143	28	188.1	200 FT

JUMPER SCHEDULE

JUMPER	ROUTE	LENGTH	QTY
DC JUMPER 8 AWG	TOP OVP TO RRU	15 FT	0
FIBER JUMPER LC-LC	TOP OVP TO RRU	15 FT	0
DC JUMPER 8 AWG	TOP OVP TO AAU	20 FT	3
FIBER JUMPER LC-LC	TOP OVP TO AAU	20 FT	3

MERIDIAN A&E GROUP
(SYNTHETIC SAMPLE)

CLIENT: ERICSSON
CARRIER: CARRIER-A

SITE ID: TXDA1024
SITE: LAKEWOOD HEIGHTS
6120 ABRAMS RD (SYNTHETIC)
DALLAS, TX 75214

STRUCTURE: MONOPOLE
HEIGHT: 150 FT

REV 2 2026-10-08
ISSUED FOR CONSTRUCTION

NOT FOR CONSTRUCTION -
SYNTHETIC POC DATA


REVISIONS
1 2026-08-20 ISSUED FOR CONSTRUCTION
2 2026-10-08 REDLINES INCORPORATED



SHEET TITLE:
ANTENNA & CABLE SCHEDULE

SHEET A-4

GROUNDING PLAN

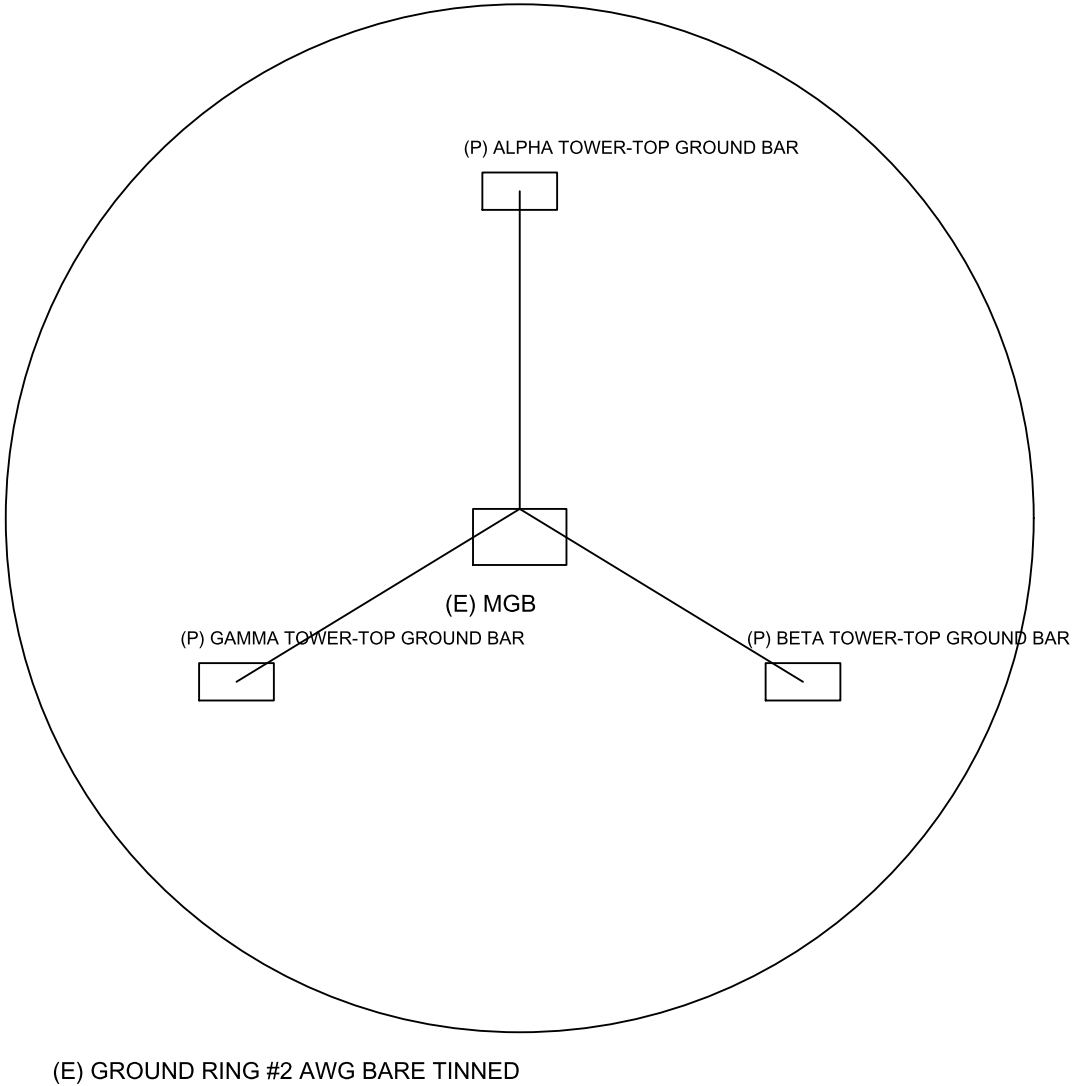

- 1. BOND EACH NEW RRU, AAU AND ANTENNA TO SECTOR GROUND BAR WITH #6 AWG.
- 2. GROUND HYBRID TRUNK AT TOP, BOTTOM AND MID-SPAN IF > 200 FT.
- 3. BOND TOP AND BASE OVP ENCLOSURES WITH #6 AWG.
- 4. ALL LUGS TWO-HOLE, TINNED, WITH ANTI-OXIDANT.

MERIDIAN A&E GROUP
(SYNTHETIC SAMPLE)

CLIENT: ERICSSON
CARRIER: CARRIER-A

SITE ID: TXDA1024
SITE: LAKEWOOD HEIGHTS
6120 ABRAMS RD (SYNTHETIC)
DALLAS, TX 75214

STRUCTURE: MONOPOLE
HEIGHT: 150 FT

REV 2 2026-10-08
ISSUED FOR CONSTRUCTION

NOT FOR CONSTRUCTION -
SYNTHETIC POC DATA

REVISIONS
1 2026-08-20 ISSUED FOR CONSTRUCTION
2 2026-10-08 REDLINES INCORPORATED



SHEET TITLE:
GROUNDING PLAN & NOTES

SHEET E-1