REDLINE SUMMARY - TXDE0831 CD REV 1

ScopeIQ - 2026-10-28 - 1 markup(s) on TXDE0831_CD_REV1.dxf - status per ScopeIQ workflow

#	SHEET	MARKUP	FROM	TO	STATUS
1	A-3	EXISTING ALPHA MEASURED AT 348 DEG (DRAWN 0 DEG). SHOW RE-ORIENTATION TO DESIGN AZIMUTH.	0 deg	348 deg	DRAFT

CARRIER-A - N41 ADD + LOW-BAND REFRESH

TXDE0831 HICKORY FLATS

SCOPE OF WORK

1. INSTALL (3) NNH4-65B-R6
2. INSTALL (3) RADIO 4480 B71 B85
3. INSTALL (3) AIR 6419 B41
4. REMOVE (3) APXVSPP18-C-A20
5. REMOVE (3) RADIO 2217 B66A
6. INSTALL (1) BASEBAND 6651 IN EXISTING CABINET
7. INSTALL (1) HYBRID TRUNK 6x12, 300 FT, WITH TOP AND BASE OVP
8. FIELD VERIFY ALL EXISTING CONDITIONS PRIOR TO CONSTRUCTION

SHEET INDEX

T-1 TITLE SHEET & SCOPE OF WORK
A-2 ELEVATION
A-3 ANTENNA LAYOUT PLAN
A-4 ANTENNA & CABLE SCHEDULE
E-1 GROUNDING PLAN & NOTES

SITE INFORMATION

SITE ID: TXDE0831
SITE NAME: Hickory Flats
MARKET: DFW
CUSTOMER: CARRIER-A
ADDRESS: 4500 Teasley Ln (synthetic)
CITY: Denton
STATE: TX
ZIP: 76210
LATITUDE: 33.158
LONGITUDE: -97.0877
STRUCTURE TYPE: Guyed tower
STRUCTURE HEIGHT (FT): 220
STRUCTURE OWNER: BluePeak Towers
PROJECT TYPE: n41 add + low-band refresh

GENERAL NOTES

CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND EXISTING CONDITIONS BEFORE ORDERING MATERIAL.
ALL WORK PER CARRIER BUILD STANDARDS AND TIA-222-H.
RF CONFIGURATION PER RFDS R3.
MOUNT AND STRUCTURAL ADEQUACY PER MA/SA REPORTS.

MERIDIAN A&E GROUP
(SYNTHETIC SAMPLE)

CLIENT: ERICSSON
CARRIER: CARRIER-A

SITE ID: TXDE0831
SITE: HICKORY FLATS
4500 TEASLEY LN (SYNTHETIC
DENTON, TX 76210


STRUCTURE: GUYED TOWER
HEIGHT: 220 FT

REV 1 2026-08-27
ISSUED FOR CONSTRUCTION

NOT FOR CONSTRUCTION - SYNTHETIC POC DATA

SHEET TITLE:
TITLE SHEET & SCOPE OF WORK

SHEET T-1

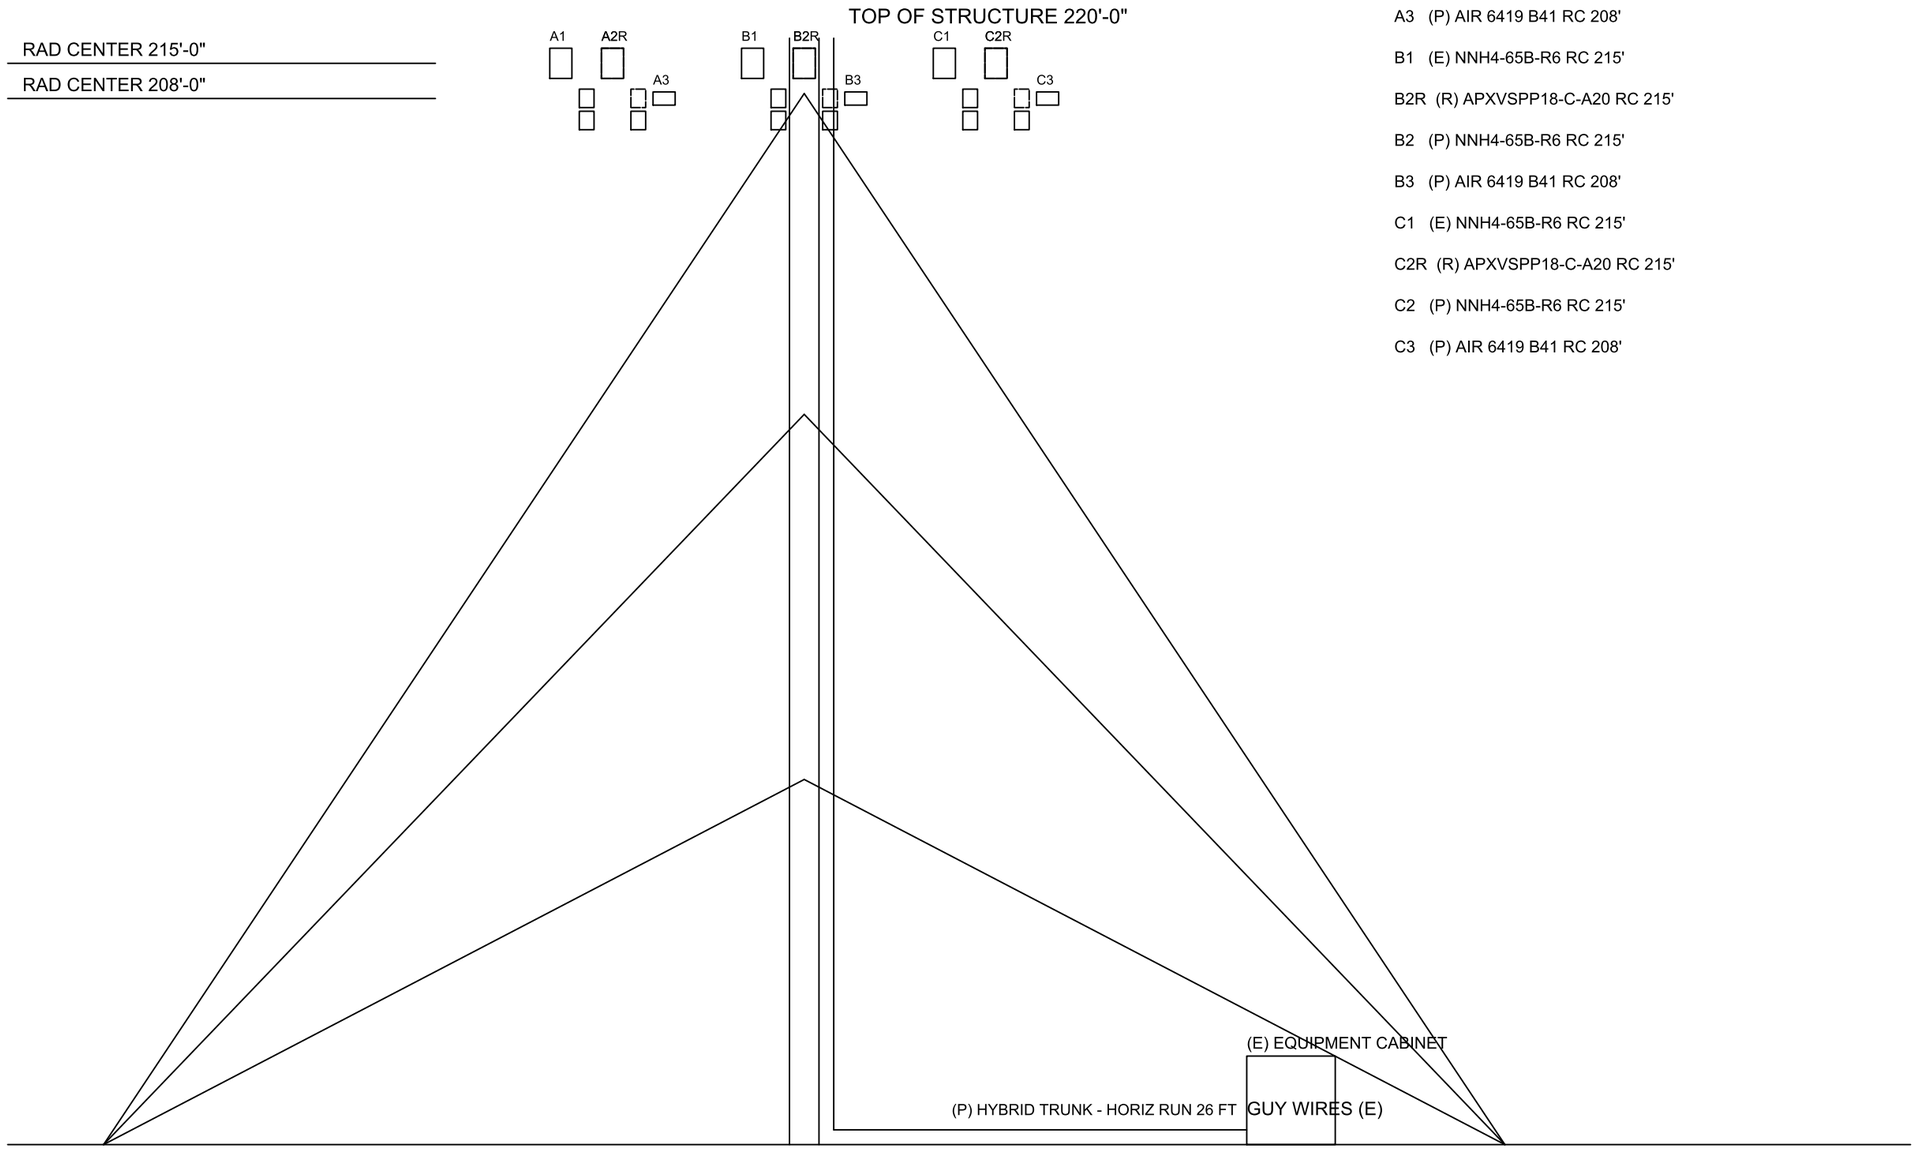

EQUIPMENT KEY

A1 (E) NNH4-65B-R6 RC 215'

A2R (R) APXVSPP18-C-A20 RC 215'

A2 (P) NNH4-65B-R6 RC 215'

A3 (P) AIR 6419 B41 RC 208'

B1 (E) NNH4-65B-R6 RC 215'

B2R (R) APXVSPP18-C-A20 RC 215'

B2 (P) NNH4-65B-R6 RC 215'

B3 (P) AIR 6419 B41 RC 208'

C1 (E) NNH4-65B-R6 RC 215'

C2R (R) APXVSPP18-C-A20 RC 215'

C2 (P) NNH4-65B-R6 RC 215'

C3 (P) AIR 6419 B41 RC 208'

MERIDIAN A&E GROUP

(SYNTHETIC SAMPLE)

CLIENT: ERICSSON

CARRIER: CARRIER-A

SITE ID: TXDE0831

SITE: HICKORY FLATS

4500 TEASLEY LN (SYNTHETIC

DENTON, TX 76210

STRUCTURE: GUYED TOWER

HEIGHT: 220 FT

REV 1 2026-08-27

ISSUED FOR CONSTRUCTION

NOT FOR CONSTRUCTION -


SYNTHETIC POC DATA

SHEET TITLE:

ELEVATION

SHEET A-2

N

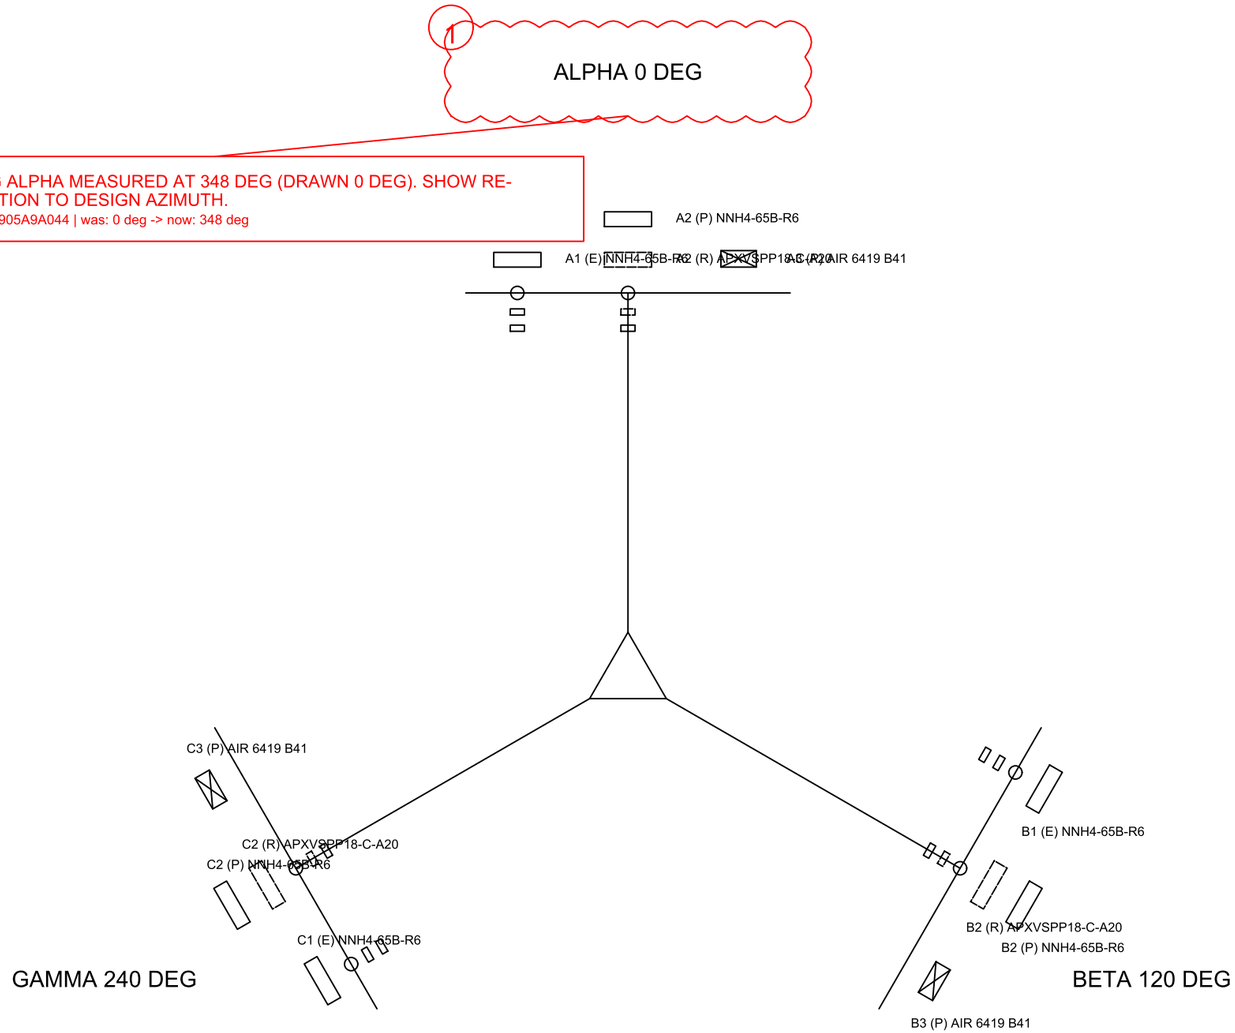

(E) EXISTING (P) PROPOSED (R) REMOVE. EQUIPMENT DATA HELD IN BLOCK ATTRIBUTES.

MERIDIAN A&E GROUP

(SYNTHETIC SAMPLE)

CLIENT: ERICSSON

CARRIER: CARRIER-A

SITE ID: TXDE0831

SITE: HICKORY FLATS

4500 TEASLEY LN (SYNTHETIC

DENTON, TX 76210

STRUCTURE: GUYED TOWER

HEIGHT: 220 FT

REV 1 2026-08-27

ISSUED FOR CONSTRUCTION

NOT FOR CONSTRUCTION -

SYNTHETIC POC DATA

SHEET TITLE:

ANTENNA LAYOUT PLAN

SHEET A-3

ANTENNA & EQUIPMENT SCHEDULE

SECTOR	AZ	POS	STATUS	TYPE	MANUFACTURER	MODEL	RC (FT)	M-TILT	BANDS
ALPHA	0	1	EXISTING	ANTENNA	COMMSCOPE	NNH4-65B-R6	215	2	LB/MB
ALPHA	0	1	EXISTING	RRU	ERICSSON	RADIO 4449 B5 B12	215	-	B5/B12
ALPHA	0	1	EXISTING	RRU	ERICSSON	RADIO 4460 B2 B66	215	-	B2/B66
ALPHA	0	2	REMOVE	ANTENNA	RFS	APXVSPP18-C-A20	215	1	MB
ALPHA	0	2	PROPOSED	ANTENNA	COMMSCOPE	NNH4-65B-R6	215	1	LB/MB
ALPHA	0	2	REMOVE	RRU	ERICSSON	RADIO 2217 B66A	215	-	B66
ALPHA	0	2	PROPOSED	RRU	ERICSSON	RADIO 4480 B71 B85	215	-	B71/B85
ALPHA	0	3	PROPOSED	AAU	ERICSSON	AIR 6419 B41	208	1	n41
BETA	120	1	EXISTING	ANTENNA	COMMSCOPE	NNH4-65B-R6	215	0	LB/MB
BETA	120	1	EXISTING	RRU	ERICSSON	RADIO 4449 B5 B12	215	-	B5/B12
BETA	120	1	EXISTING	RRU	ERICSSON	RADIO 4460 B2 B66	215	-	B2/B66
BETA	120	2	REMOVE	ANTENNA	RFS	APXVSPP18-C-A20	215	0	MB
BETA	120	2	PROPOSED	ANTENNA	COMMSCOPE	NNH4-65B-R6	215	0	LB/MB
BETA	120	2	REMOVE	RRU	ERICSSON	RADIO 2217 B66A	215	-	B66
BETA	120	2	PROPOSED	RRU	ERICSSON	RADIO 4480 B71 B85	215	-	B71/B85
BETA	120	3	PROPOSED	AAU	ERICSSON	AIR 6419 B41	208	0	n41
GAMMA	240	1	EXISTING	ANTENNA	COMMSCOPE	NNH4-65B-R6	215	0	LB/MB
GAMMA	240	1	EXISTING	RRU	ERICSSON	RADIO 4449 B5 B12	215	-	B5/B12
GAMMA	240	1	EXISTING	RRU	ERICSSON	RADIO 4460 B2 B66	215	-	B2/B66
GAMMA	240	2	REMOVE	ANTENNA	RFS	APXVSPP18-C-A20	215	2	MB
GAMMA	240	2	PROPOSED	ANTENNA	COMMSCOPE	NNH4-65B-R6	215	2	LB/MB
GAMMA	240	2	REMOVE	RRU	ERICSSON	RADIO 2217 B66A	215	-	B66
GAMMA	240	2	PROPOSED	RRU	ERICSSON	RADIO 4480 B71 B85	215	-	B71/B85
GAMMA	240	3	PROPOSED	AAU	ERICSSON	AIR 6419 B41	208	1	n41

CABLE SCHEDULE (REQ'D = 1.10 x (VERT + HORIZ))

TRUNK	TYPE	FROM	TO	VERT (FT)	HORIZ (FT)	REQ'D (FT)	SPECIFIED
T1	HYBRID 6x12	BASE OVP / CABINET	TOP OVP	220	26	270.6	300 FT

JUMPER SCHEDULE

JUMPER	ROUTE	LENGTH	QTY
DC JUMPER 8 AWG	TOP OVP TO RRU	15 FT	3
FIBER JUMPER LC-LC	TOP OVP TO RRU	15 FT	3
DC JUMPER 8 AWG	TOP OVP TO AAU	20 FT	3
FIBER JUMPER LC-LC	TOP OVP TO AAU	20 FT	3

MERIDIAN A&E GROUP

(SYNTHETIC SAMPLE)

CLIENT: ERICSSON

CARRIER: CARRIER-A

SITE ID: TXDE0831

SITE: HICKORY FLATS

4500 TEASLEY LN (SYNTHETIC

DENTON, TX 76210

STRUCTURE: GUYED TOWER

HEIGHT: 220 FT

REV 1 2026-08-27

ISSUED FOR CONSTRUCTION

NOT FOR CONSTRUCTION -

SYNTHETIC POC DATA


SHEET TITLE:

ANTENNA & CABLE SCHEDULE

SHEET A-4

GROUNDING PLAN

1. BOND EACH NEW RRU, AAU AND ANTENNA TO SECTOR GROUND BAR WITH #6 AWG.
2. GROUND HYBRID TRUNK AT TOP, BOTTOM AND MID-SPAN IF > 200 FT.
3. BOND TOP AND BASE OVP ENCLOSURES WITH #6 AWG.
4. ALL LUGS TWO-HOLE, TINNED, WITH ANTI-OXIDANT.

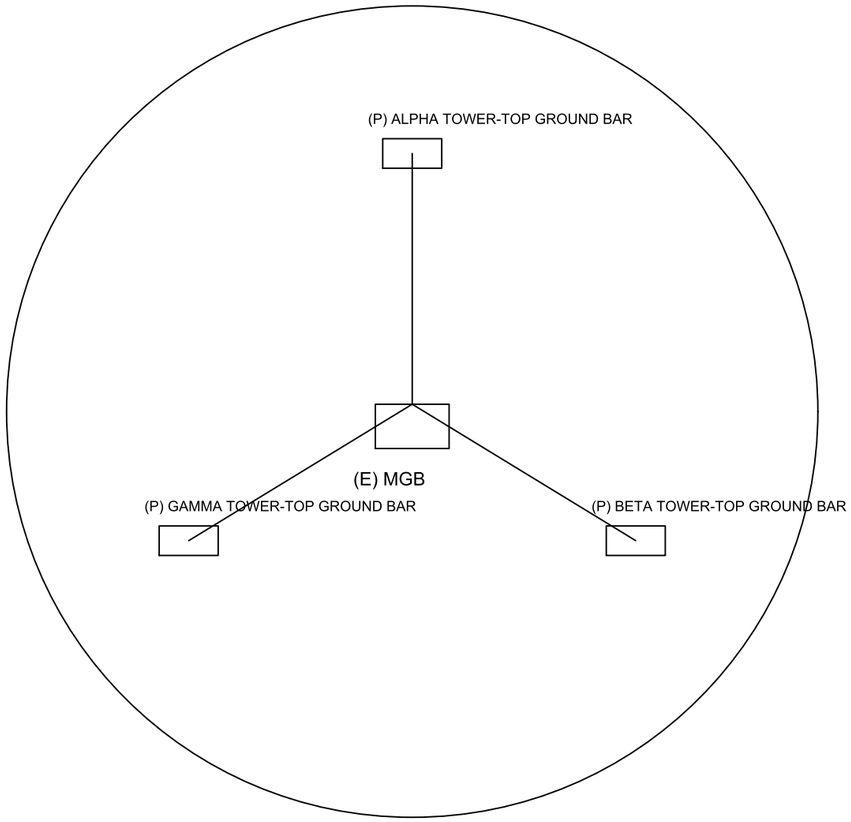

(E) GROUND RING #2 AWG BARE TINNED

MERIDIAN A&E GROUP

(SYNTHETIC SAMPLE)

CLIENT: ERICSSON

CARRIER: CARRIER-A

SITE ID: TXDE0831

SITE: HICKORY FLATS

4500 TEASLEY LN (SYNTHETIC

DENTON, TX 76210

STRUCTURE: GUYED TOWER

HEIGHT: 220 FT

REV 1 2026-08-27

ISSUED FOR CONSTRUCTION

NOT FOR CONSTRUCTION -

SYNTHETIC POC DATA

SHEET TITLE:

GROUNDING PLAN & NOTES

SHEET E-1